










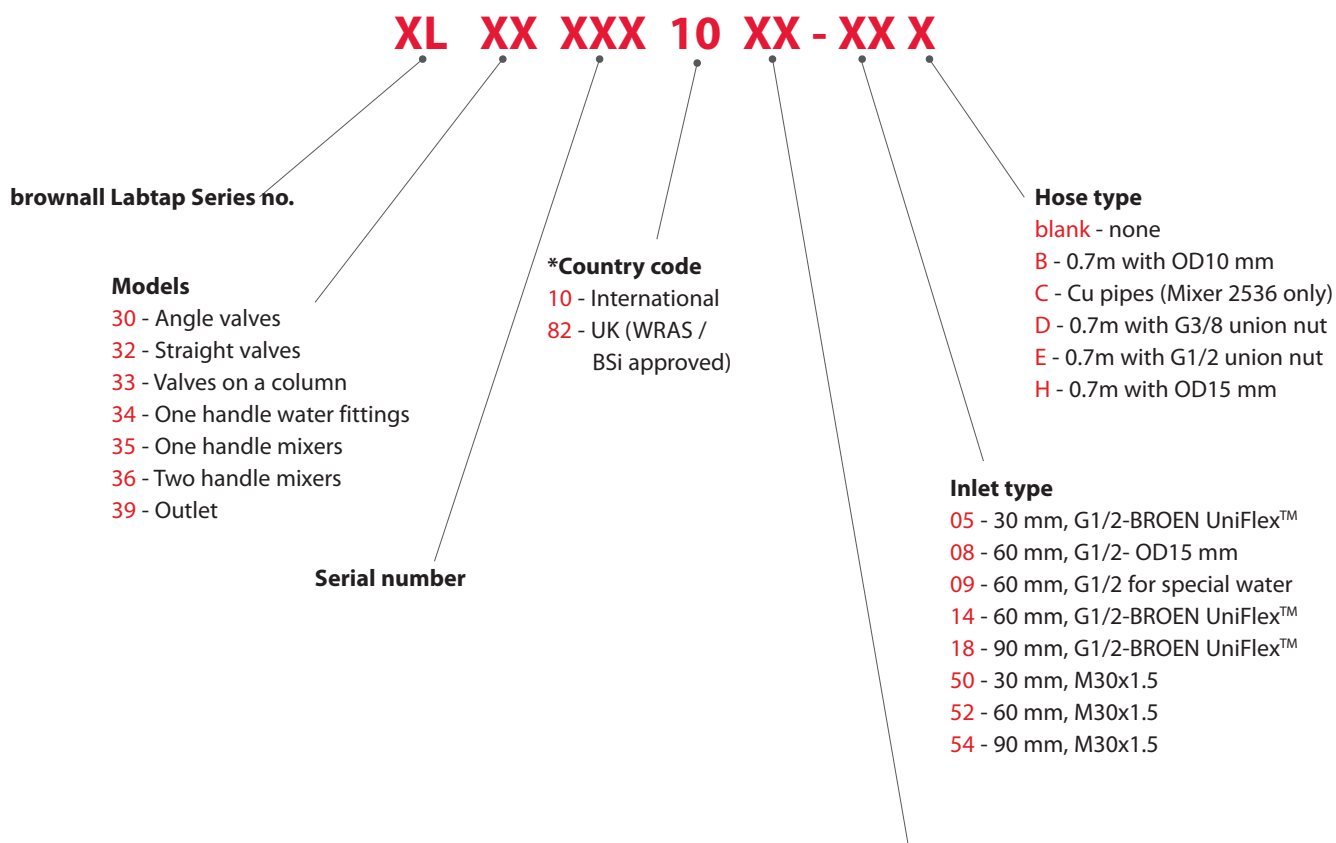



















- ordering information

Generally, item numbers for **brownall Labtap®** fittings have the following structure



Media code	
 01 - Water potable, cold (WPC)	 23 - Nitrogen (N ₂)
 02 - Water potable, hot (WPH)	 24 - Carbon Dioxide (CO ₂)
 03 - Distilled water (WDI)	 25 - Argon (Ar)
 07 - Water non-potable, cold (WNC)	 26 - Helium (He)
 08 - Water non-potable, hot (WNH)	 27 - Dinitrogen monoxide, nitrous oxide (N ₂ O)
 09 - Natural gas (G)	 28 - Low vacuum - 100 kPa to 0,1 kPa (V)
 11 - Liquefied petrol gas (LPG)	 29 - Fine vacuum - 0,1 kPa to 0,001 kPa (VF)
 13 - Butane (C ₄ H ₁₀)	 30 - High vacuum - 0,1 kPa to 0,0000001 kPa (VH)
 15 - Propane (C ₃ H ₈)	 35 - Tempered water (one handle mixer)
 17 - Acetylene (C ₂ H ₂)	 36 - Deionised water, cold (WDC)
 19 - Hydrogen (H ₂)	  39 - Water potable (WPC /WPH)
 21 - Compressed air (CA)	  40 - Water non-potable (WNC /WNH)
 22 - Oxygen (O ₂)	 46 - Methane (CH ₄)

brownall Labtap®

Water fittings

Water

Bench mounted


Bench mounted right hand fitting with fixed swanneck and fixed nozzle.

Weight: Approx. 1.3 kg

XL 34 013 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 34 013 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

-  01 - Water potable, cold (WPC)
  02 - Water potable, hot (WPH)
-  07 - Water non-potable, cold (WNC)
  08 - Water non-potable, hot (WNH)

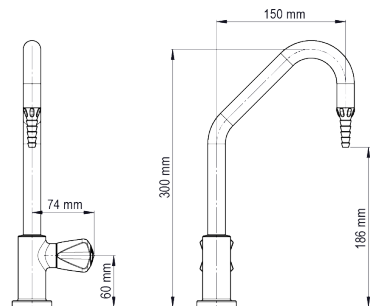

Water

Bench mounted


Bench mounted left hand fitting with fixed swanneck and fixed nozzle.

Weight: Approx. 1.3 kg

XL 34 011 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 34 011 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

-  01 - Water potable, cold (WPC)
  02 - Water potable, hot (WPH)
-  07 - Water non-potable, cold (WNC)
  08 - Water non-potable, hot (WNH)

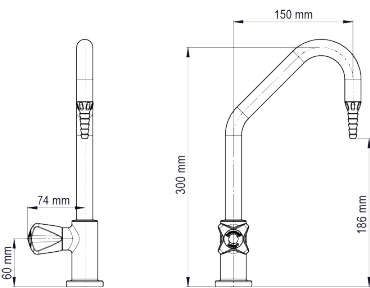

Water

Bench mounted


Bench mounted fitting with swivel swanneck and fixed nozzle.

Weight: Approx. 1.3 kg

XL 34 008 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 34 008 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

-  01 - Water potable, cold (WPC)
  02 - Water potable, hot (WPH)
-  07 - Water non-potable, cold (WNC)
  08 - Water non-potable, hot (WNH)



Water fittings

Water


Bench mounted

Bench mounted pillar angle fitting with fixed nozzle.

Weight: Approx. 1.5 kg

XL 33 085 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 33 085 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:



Water


Bench mounted

Bench mounted two-way U-shape fitting with fixed nozzle.

Weight: Approx. 2.5 kg

XL 33 086 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 33 086 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

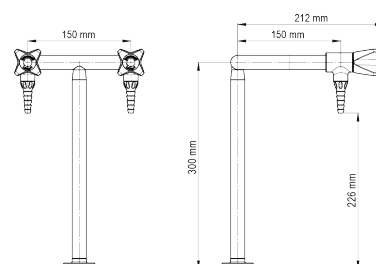

Water


Bench mounted

Bench mounted two-way T-shape fitting with fixed nozzle.

Weight: Approx. 2.5 kg

XL 33 087 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 33 087 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

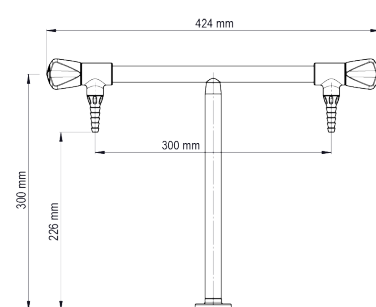

Water


Bench mounted

Bench mounted two side arms, swivel swanneck and fixed nozzle.

Weight: Approx. 3.5 kg

XL 33 094 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 33 094 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

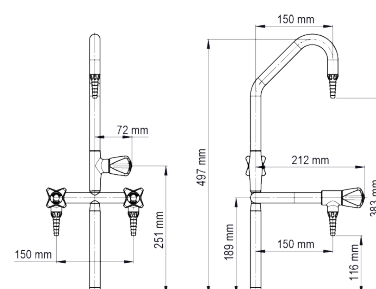

Water fittings

Water

Bench mounted

Bench mounted right hand fitting with fixed swanneck and pipe interruptor

Weight: Approx. 1.4 kg

XL 34 072 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 34 072 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:



01 - Water potable, cold (WPC)




02 - Water potable, hot (WPH)



07 - Water non-potable, cold (WNC)



08 - Water non-potable, hot (WNH)

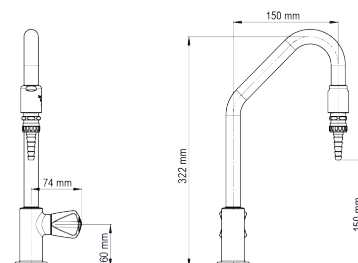

Water

Bench mounted

Bench mounted left hand fitting with fixed swanneck and pipe interruptor

Weight: Approx. 1.4 kg

XL 34 073 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 34 073 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:



01 - Water potable, cold (WPC)




02 - Water potable, hot (WPH)



07 - Water non-potable, cold (WNC)



08 - Water non-potable, hot (WNH)

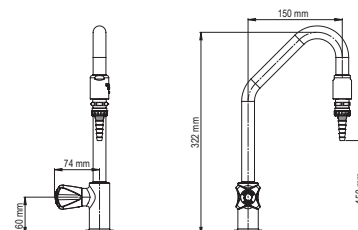

Water

Bench mounted

Bench mounted fitting with swivel swanneck and pipe interruptor

Weight: Approx. 1.4 kg

XL 34 071 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 34 071 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:



01 - Water potable, cold (WPC)




02 - Water potable, hot (WPH)



07 - Water non-potable, cold (WNC)



08 - Water non-potable, hot (WNH)



Water

Bench mounted

Bench mounted pillar angle fitting with pipe interruptor

Weight: Approx. 1.4 kg

XL 33 222 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 33 222 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:



01 - Water potable, cold (WPC)




02 - Water potable, hot (WPH)



07 - Water non-potable, cold (WNC)



08 - Water non-potable, hot (WNH)



Water mixers

Water



Bench mounted

Bench mounted mixer fitting with areator

Weight: Approx. 2.2 kg

XL 36 152 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 36 152 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

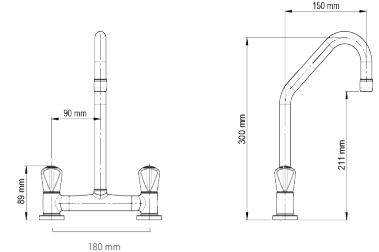

Water



Bench mounted

Bench mounted mixer fitting with areator and wrist action levers

Weight: Approx. 2.5 kg

XL 36 171 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 36 171 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

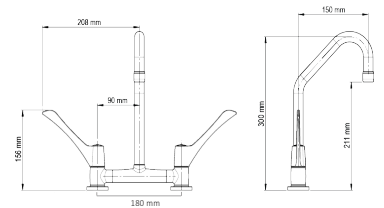

Water / Divided flow



Bench mounted

Bench mounted divided flow mixer with areator

Weight: Approx. 2.2 kg

XL 36 155 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 36 155 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

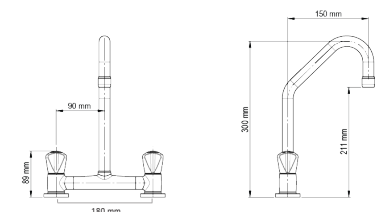

Water / Divided flow



Bench mounted

Bench mounted divided flow mixer with areator and wrist action levers.

Weight: Approx. 2.5 kg

XL 36 154 82 XX - 14E	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with 1/2" union nut *
XL 36 154 82 XX - 14H	60 mm, 1/2" ISO 7/1-R - UniFlex™ Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

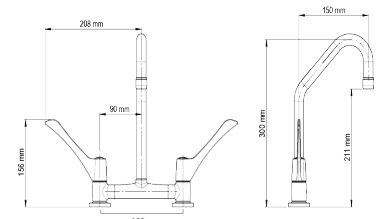

Water mixers

Water





Bench mounted


Bench mounted single hole mixer with swivel swanneck and fixed nozzle.

Weight: Approx. 2.2 kg

XL 36 039 82 XX - 52E	60 mm, m30x1.5, Pipe: 0,7m pipe with 1/2" union nut *
XL 36 039 82 XX - 52H	60 mm, m30x1.5, Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

-  39 - Water potable, cold (WPC) + water potable, hot (WPH)
-  40 - Water non-potable, cold (WNC) Water non-potable, hot (WNH)

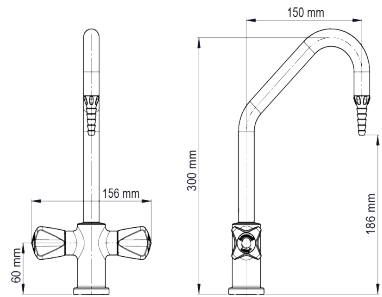

Water





Bench mounted


Bench mounted single hole mixer with swivel swanneck and fixed nozzle and wrist action levers.

Weight: Approx. 2.5 kg

XL 36 041 82 XX - 52E	60 mm, m30x1.5, Pipe: 0,7m pipe with 1/2" union nut *
XL 36 041 82 XX - 52H	60 mm, m30x1.5, Hose: 0,7m with OD15mm brass tail *

Available for various media. Please replace XX with the relevant media:

-  39 - Water potable, cold (WPC) + water potable, hot (WPH)
-  40 - Water non-potable, cold (WNC) Water non-potable, hot (WNH)

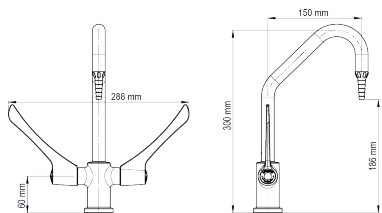

XL 3317010XX-09

Special Water


Bench mounted

Pillar angle fitting with 10 x 1,5 mm OD LLDPE (Linear Low-Density Polyethylene) tube protected by a brass pipe.

Weight: Approx. 1.5 kg

Media colour coding:

For media code XX please refer to page 1

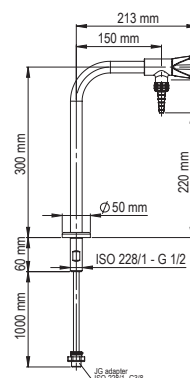

XL 3320110XX

Special Water

Bench mounted

Recirculating special water fitting with 1 1/4" ABS Tee-piece.

For model with OD25 mm PP-n Tee-piece please refer to XL3302110XX.

Weight: Approx. 1.8 kg

Media colour coding:

For media code XX please refer to page 1.

