


Area of Application:
Bench/Table mounted
Water
Min. Working pressure 1,5 Bar
Max. working pressure 10 bar
Min. temperature 5°C
Max. temperature 80°C

Details:
Check Valve flowfix 14 L/min
45° Duo Cup


Materials in media contact:
PA
SS, AISI 316
Rubber, EPDM
POM
TPE

Mounting:
M30x1,5 (See 94G0232)

Inlet / outlet connection:
ISO228/1 - G½", Union nut
Easy to Clean Spray Head

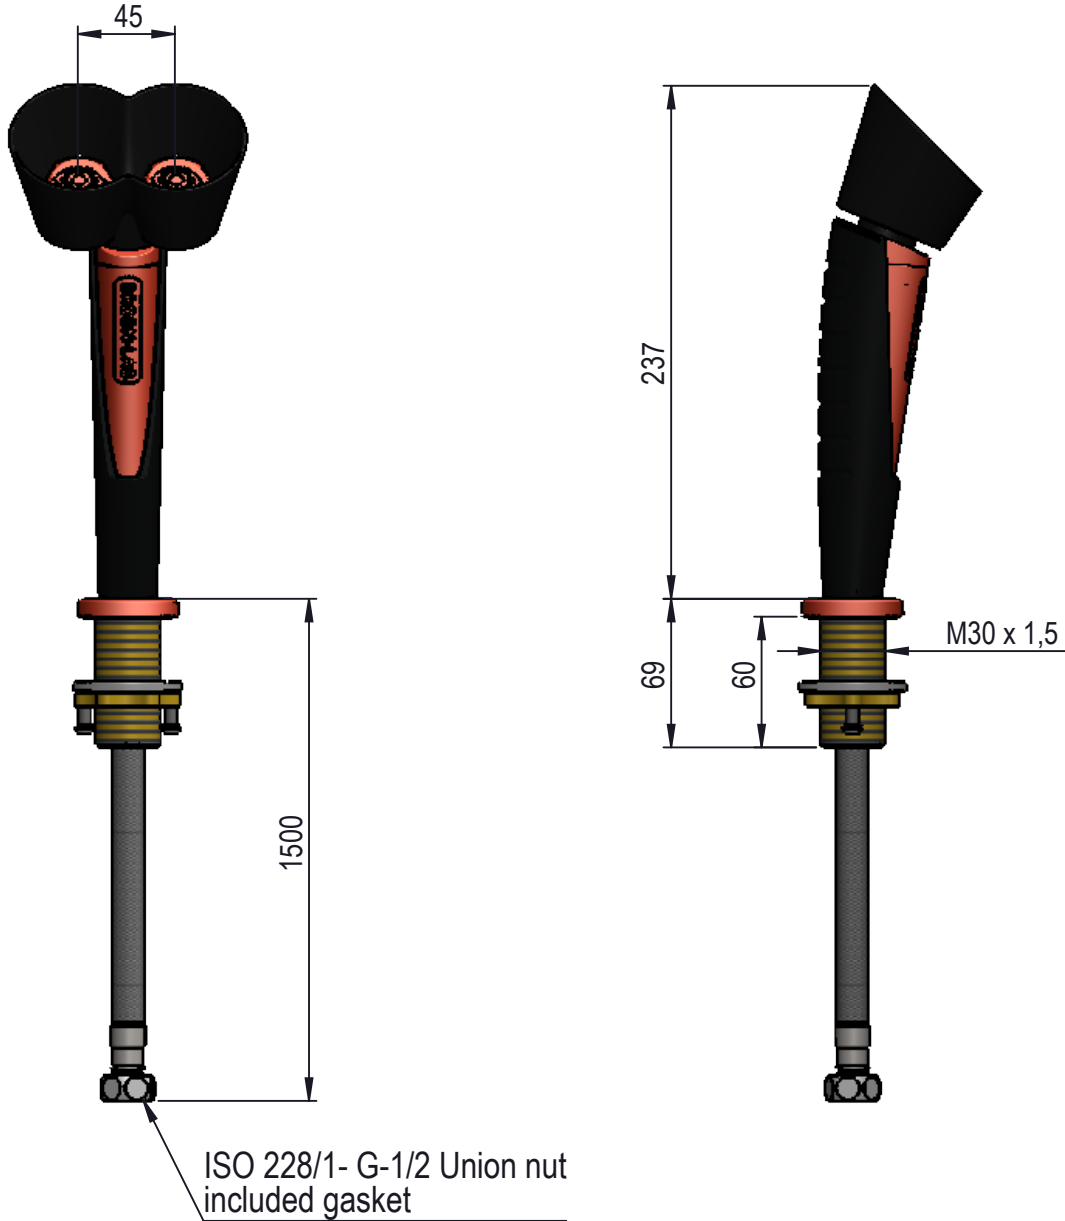

17001970
Signs - instructions

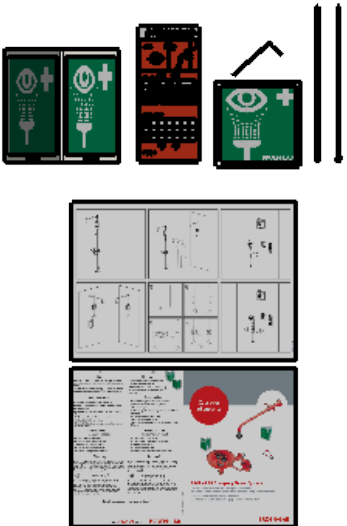

Description: BROEN-LAB Emerg. Handheld Eye Shower, Bench/Table mounted, ISO228/1 - G½", 45° Duo Cup, .									
							Media: Water		
							Comments: Single packed		
							Drawing type: Customer drawing		Weight: 0.401 Kg
Rev.	Pos.	Date	TM No.	Design by	Drawn by	Change:	Designed by: JAK	Drawn by: MBM	Released on TM No. 06-05-2019
BROEN-LAB							This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.		
							Format: A3	Drawing No.: 27100091005011	