

Area of Application:
Wall/Panel mounted
Burning gases

Max. working pressure 7 bar





Details:
 "Lift/turn" safety handle, open/close 90°
 3-Zone colour, acc. to EN13792:2002
 BROEN-LAB Polyester powder coated colour 2700

Fixed nozzle

Materials in media contact:
Brass
Rubber, NBR
Mineral oil based lubricant
Nickel plated, Brass

Mounting:
Adaptor ISO7/1, 3/8"

Inlet / outlet connection:
ISO228/1 - G $\frac{3}{8}$ "
DIN 12 898 hose nozzle

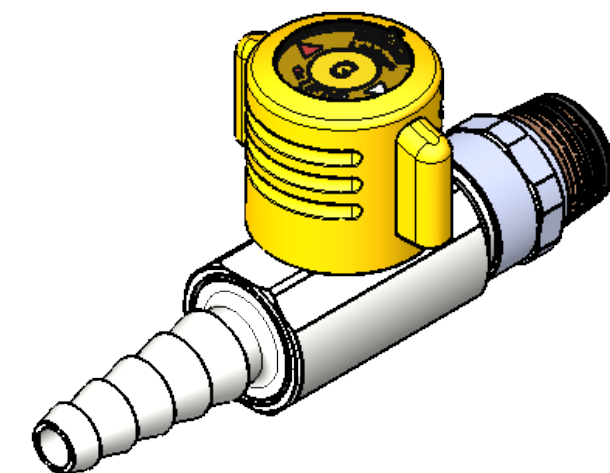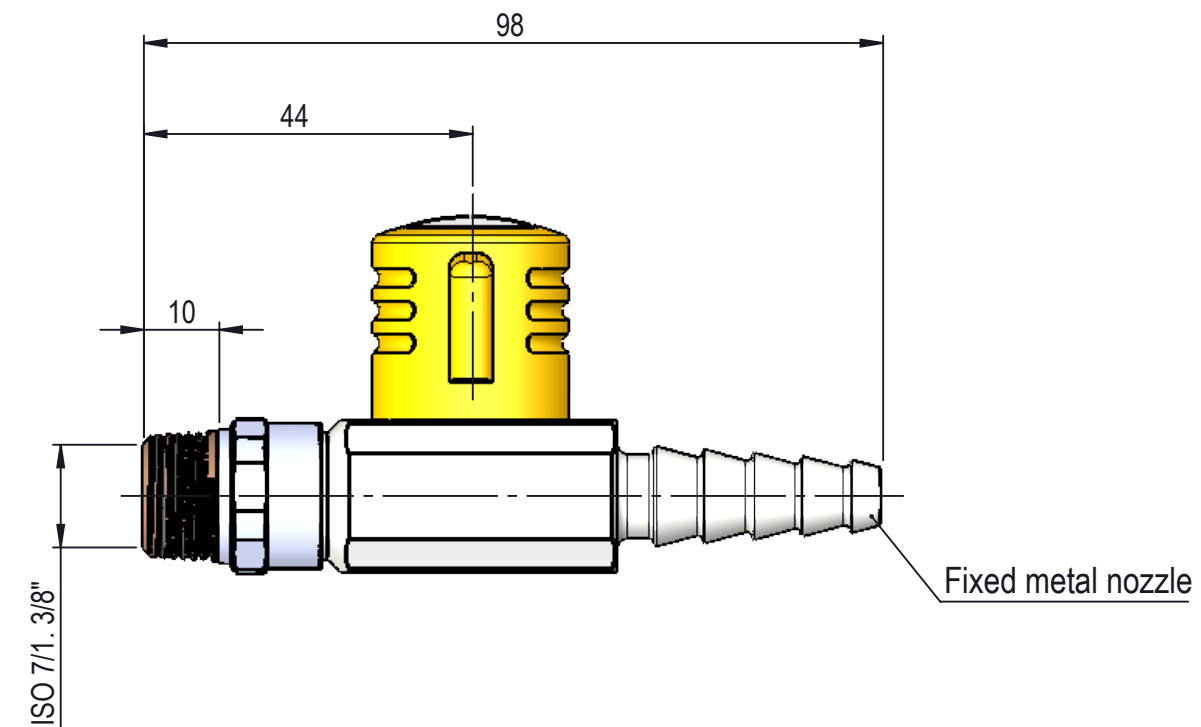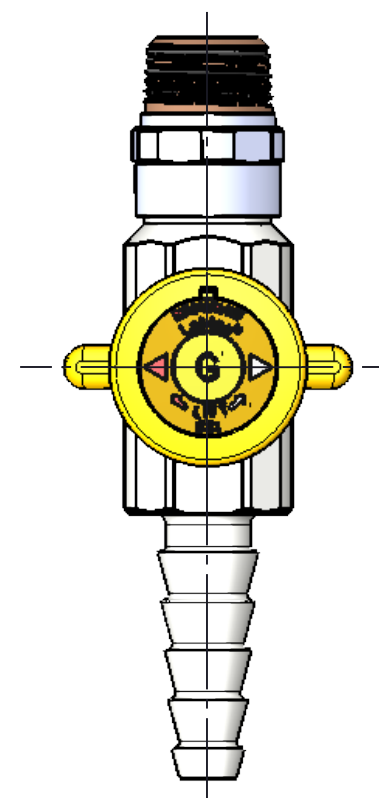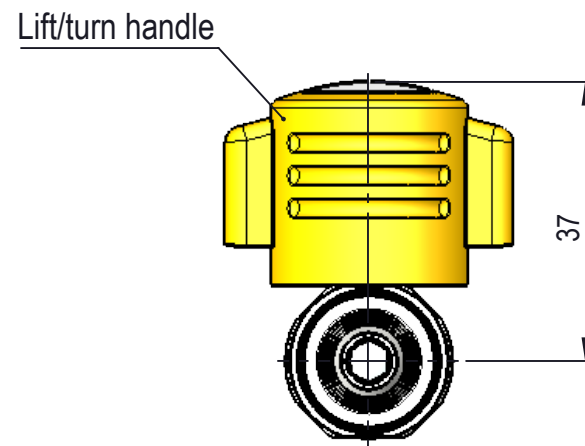

MEDIA CODE XX FOR
BURNING GAS FITTINGS FOR
LIFT / TURN HANDLE
ACCORDING TO EN 13792
*Model shown for G

Media	Media description	Media code XX
G	Natural gas	10
LPG	Propane/butane (liquefied gasses)	12

Description:	1-Valve, Wall/Panel mounted, ISO7/1, Fix. Nozzle, DIN 12 898 hose nozzle
--------------	--

							Media:	Burning gases			
							Comments:				
							Drawing type:	Customer drawing	Weight:	0.184 Kg	
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by:	Drawn by:	Released on TM No.	Date (DD-MM-YY):	
							PEC	PEC		28-11-24	
brownall Labtap®				This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S. Revision 14-01-2011			Format:	Drawing No.:			XL2039782XX
							A3				