

Area of Application:
Bench mounted
Water

Max. working pressure 10 bar
Temperature range 5°C-65°C

Details:
Rubber sealed headwork open/close 2x360°
3-Zone colour, acc. to EN13792:2002

Fixed
Fixed nozzle

Materials in media contact:
Brass
Rubber, EPDM
Silicone based lubricant
PP
SPX (Soft PEX)



Mounting:
½" nut with locking pins, O-ring and washer (See 94G0232)

Inlet / outlet connection:
Compression fitting for OD 15mm tube
DIN 12 898 hose nozzle

Polypropylene handle

Fixed polypropylene nozzle

Ø 15

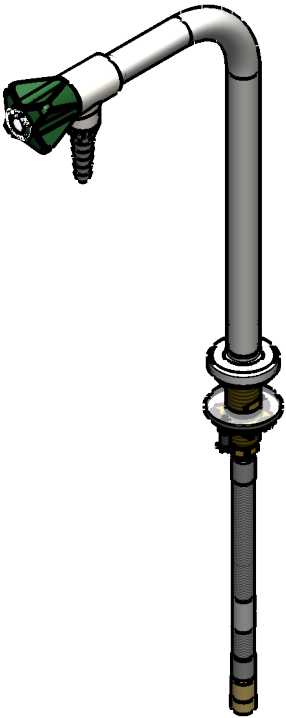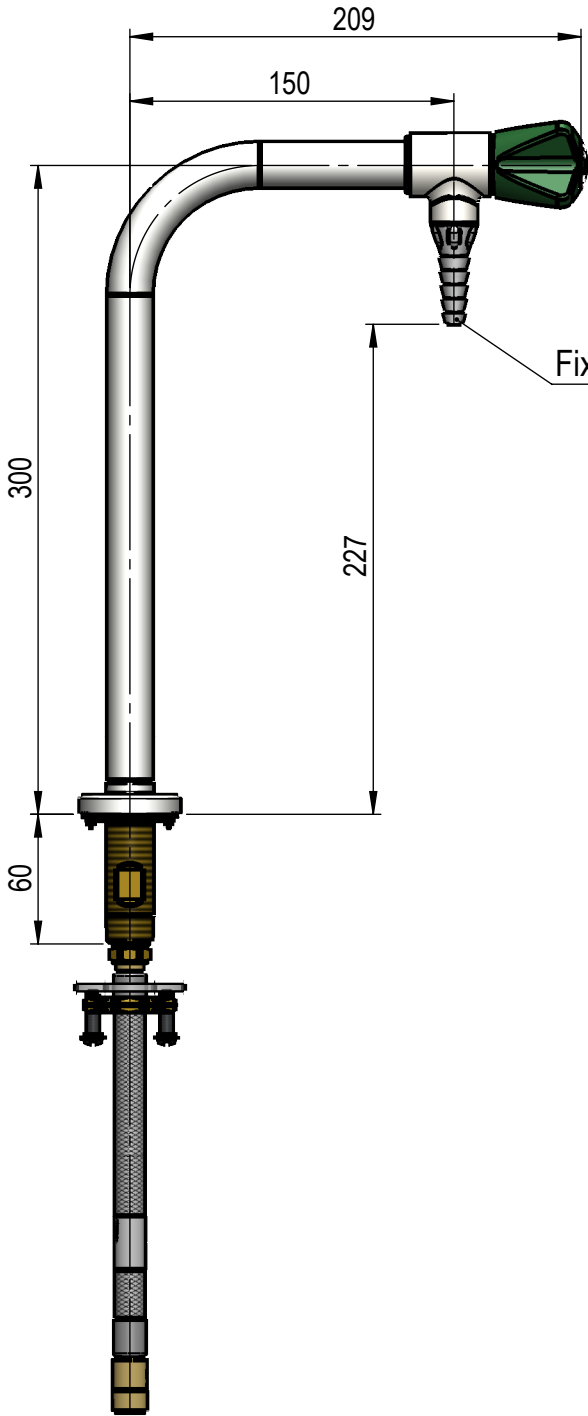

MEDIA CODE XX FOR WATER
ONE MEDIA FITTING
ACCORDING TO EN 13792
*Model shown for WPC

Media	Media description	Media code XX
WPC	Water potable cold	01
WPH	Water potable hot	02
WCF	Water coolant, feed	05
WCR	Water coolant, return	06
WNC	Water non-potable, cold	07
WNH	Water non-potable, hot	08
WRC	River water cold	33

Description: 1-Valve, Bench mounted, 1-Hole, Fixed, Hose connection									
							Media: Water		
							Comments:		
							Drawing type: Customer drawing		Weight: 1.188 Kg
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by: ROE	Drawn by: MWA	Released on TM No. 27-07-20
brownall Labtap®						This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S. Revision 14-01-2011			
							Format: A3	Drawing No.: XL3308582XX-14H	