

Area of Application:
Bench mounted
Water

Max. working pressure 10 bar
Temperature range 5°C-65°C


Details:
Rubber sealed headwork open/close 2x360°
3-Zone colour, acc. to EN13792:2002

Swivel spout
Fixed nozzle




Materials in media contact:
Brass
Rubber. EPDM
Silicone based lubricant
PP
SPX (Soft PEX)

Mounting:
½" nut with locking pins, O-ring and washer (See 94G0232)

Inlet / outlet connection:
DN8 hose with G½ female inlet, Union nut
DIN 12 898 hose nozzle

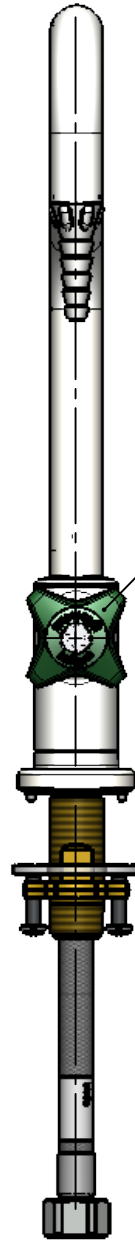

Polypropylene handle

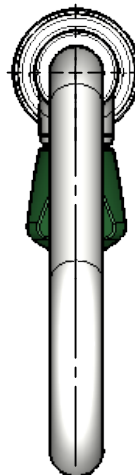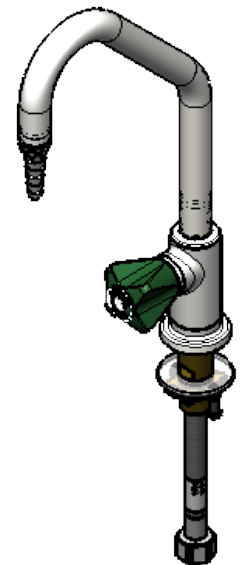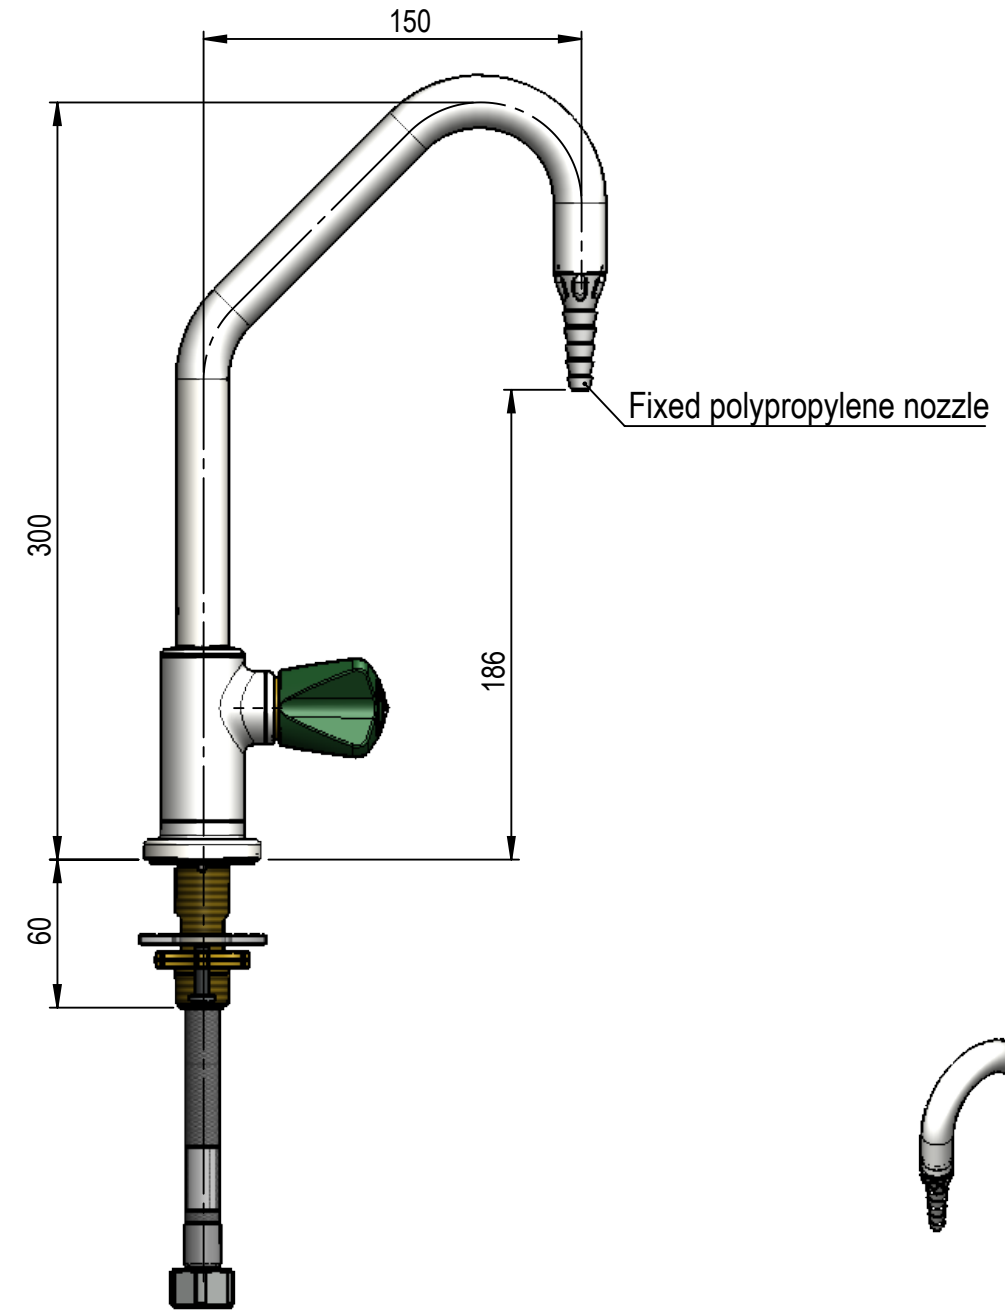

MEDIA CODE XX FOR WATER
ONE MEDIA FITTING
ACCORDING TO EN 13792
*Model shown for WPC

Media	Media description	Media code XX
WPC	Water potable cold	01
WPH	Water potable hot	02
WCF	Water coolant, feed	05
WCR	Water coolant, return	06
WNC	Water non-potable, cold	07
WNH	Water non-potable, hot	08
WRC	River water cold	33

Description: 1-Valve, Bench mounted, 1-Hole, Swivel spout, DIN 12 898 hose nozzle										
							Media: Water			
							Comments:			
							Drawing type: Customer drawing		Weight: 1.332 Kg	
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by: REK	Drawn by: REK	Released on TM No. 04-12-20	
brownall ®				This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S. Revision 14-01-2011			Format: A3			Drawing No.: XL3400882XX-14E