

Area of Application:
Bench mounted
Water

Max. working pressure 10 bar
Temperature range 5°C-65°C

Details:
Rubber sealed headwork open/close 2x360°
3-Zone colour, acc. to EN13792:2002
BROEN-LAB Polyester powder coated colour 2700
Swivel spout
Fixed nozzle

Materials in media contact:
Brass
Rubber. EPDM
PP
Silicone based lubricant
SPX (Soft PEX)



Mounting:
M30x1,5 nut with locking pins, O-ring and washer (See 94G0232)

Inlet / outlet connection:
ISO228/1 - G½", Union nut
DIN 12 898 hose nozzle

Polypropylene handle

M30x1.5

154

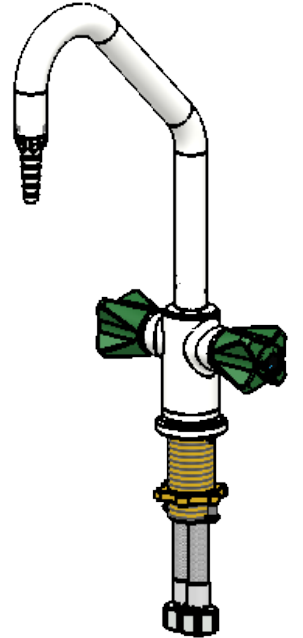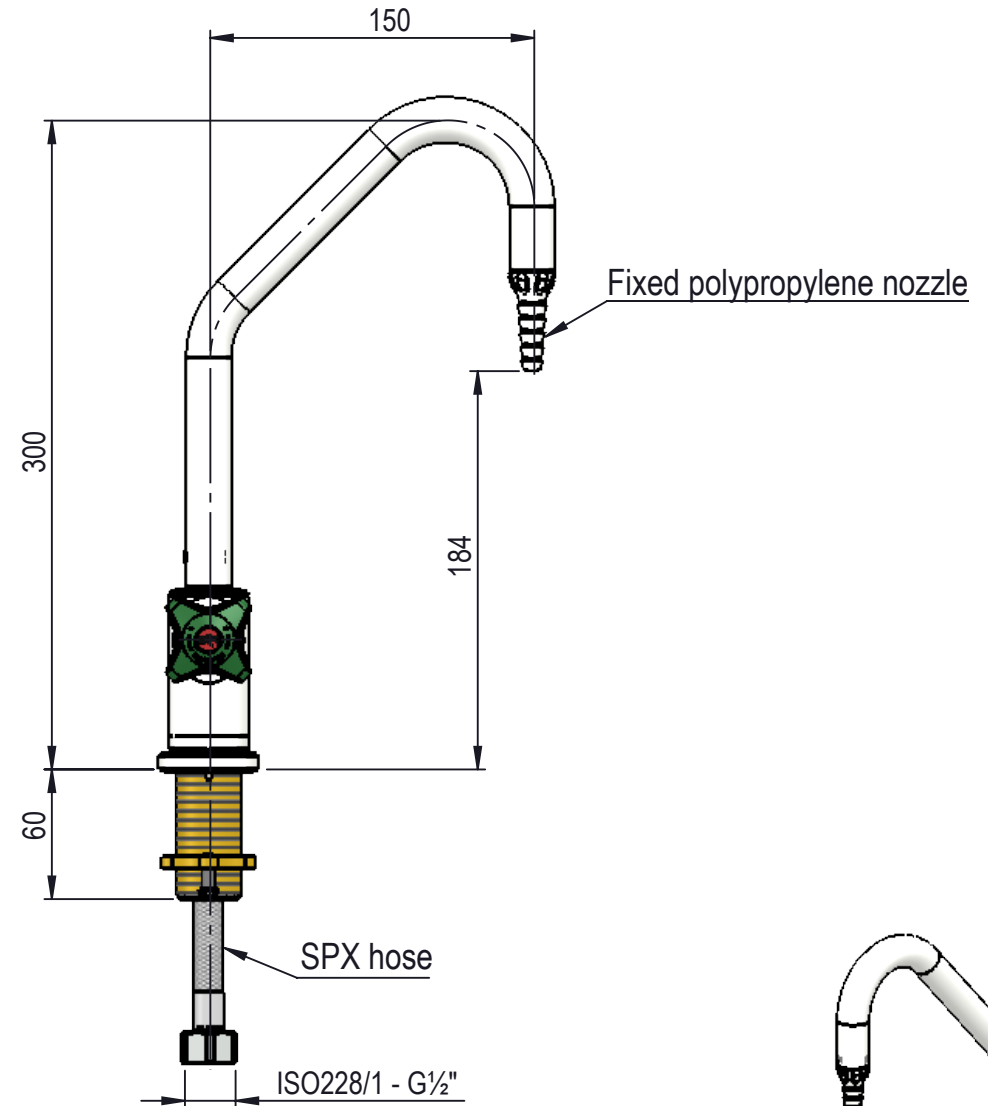

MEDIA CODE XX FOR WATER
TWO HANDLE MIXER
*Model shown for WPC/WPH

Media	Media description	Media code XX
WPC WPH	Water potable cold / hot	39
WNC WNH	Water non-potable cold / hot	40

Description: 2-Hand.Mix, Bench mounted, 1-Hole, Swivel spout, DIN 12 898 hose nozzle

								Media:	Water
								Comments:	
								Drawing type:	Customer drawing
								Weight:	1.602 Kg
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by:	Drawn by:	Released on TM No.
							VEF	VEF	
									Date (DD-MM-YY):
									18-07-24
							Format:	Drawing No.:	
							A3		XL3603982XX-52E

brownall
Labtap®

This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.
Revision 14-01-2011