

Area of Application:
Bench mounted
Water

Max. working pressure 10 bar

Temperature range 5°C-65°C

Details:
Ceramic headwork open/close 90°
3-Zone colour, acc. to EN13792:2002

Swivel spout
Aerator

Materials in media contact:


Brass
Rubber, EPDM
Silicone based lubricant
Ceramic
POM
SPX (Soft PEX)

Mounting:
1/2" nut with locking plate, O-ring and washer (See 94G0232)

Inlet / outlet connection:
DN8 hose with G $\frac{1}{2}$ female inlet
Aerator



Aerator

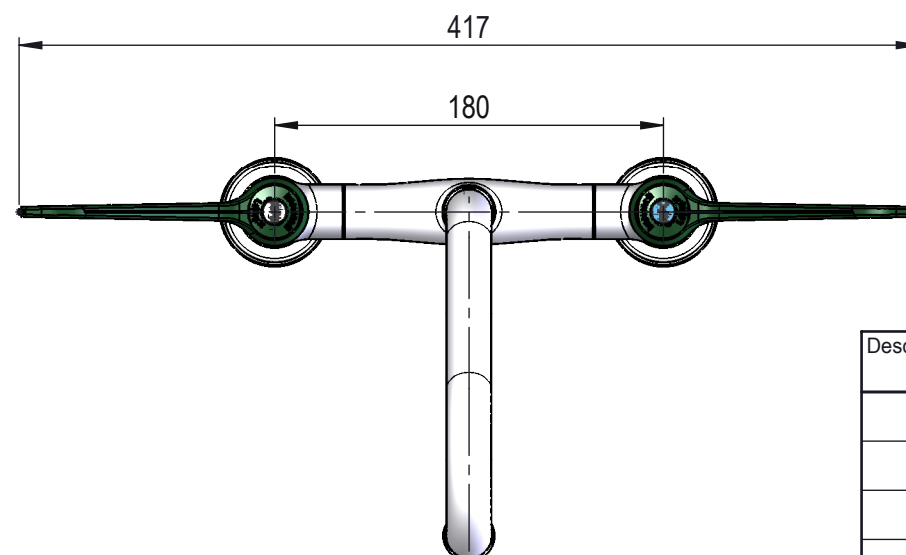

Description: 2-Hand.Mix, Bench mounted, 2-Hole, , Hose connection										
							Media: Water			
							Comments:			
							Drawing type: Customer drawing		Weight: 2.409 Kg	
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by: BJP		Drawn by: MWA	
				This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S. Revision 14-01-2011		Released on TM No.		Date (DD-MM-YY): 11-11-20		
						Format: A3		Drawing No.: XL3615482XX-14E		