

Area of Application:
Bench mounted
Hot and cold water

Max. working pressure 10 bar

Temperature range 5°C-65°C




Details:
Ceramic headwork open / close 90°
3-Zone colour, acc. to EN13792:2002

Swivel spout
Aerator

Materials in media contact:
Brass
Rubber, EPDM
Silicone based lubricant
Ceramic
POM
SPX (Soft PEX)

Mounting:
½" nut with locking pins, O-ring and washer (See 94G0232)

Inlet / outlet connection:
DN8 hose with G½ Union nut (700mm)
Aerator

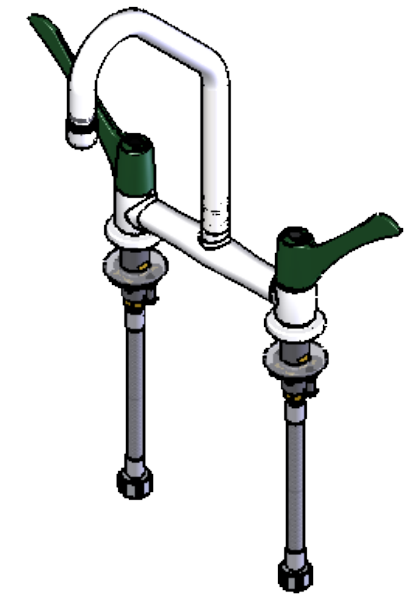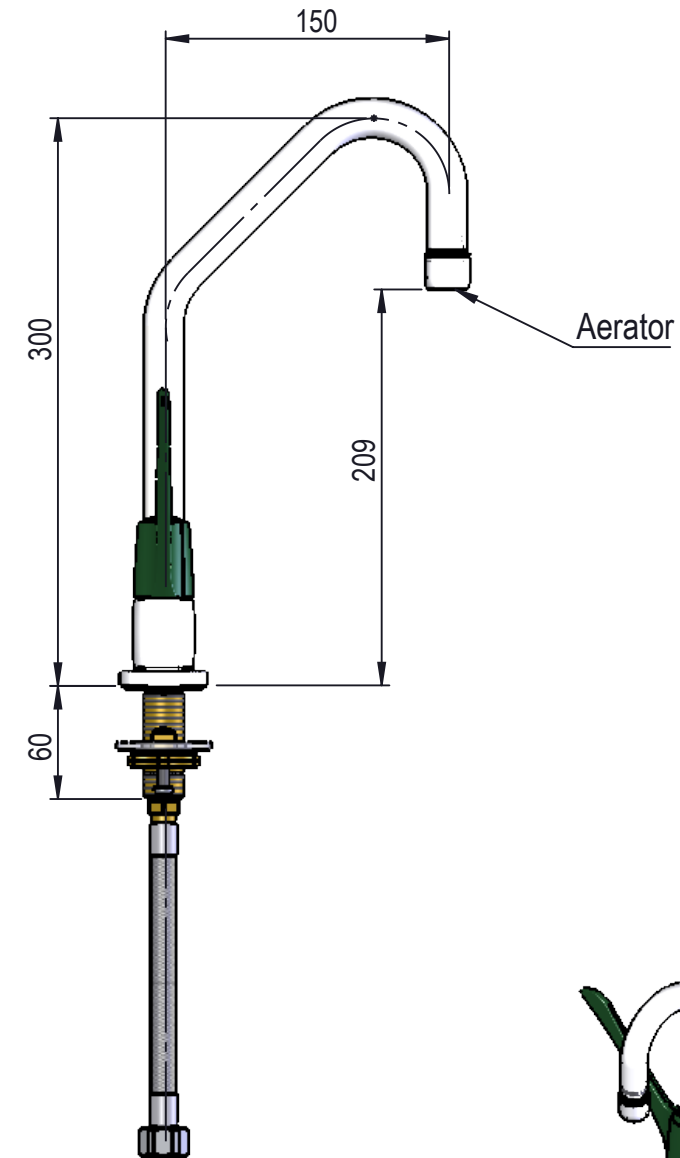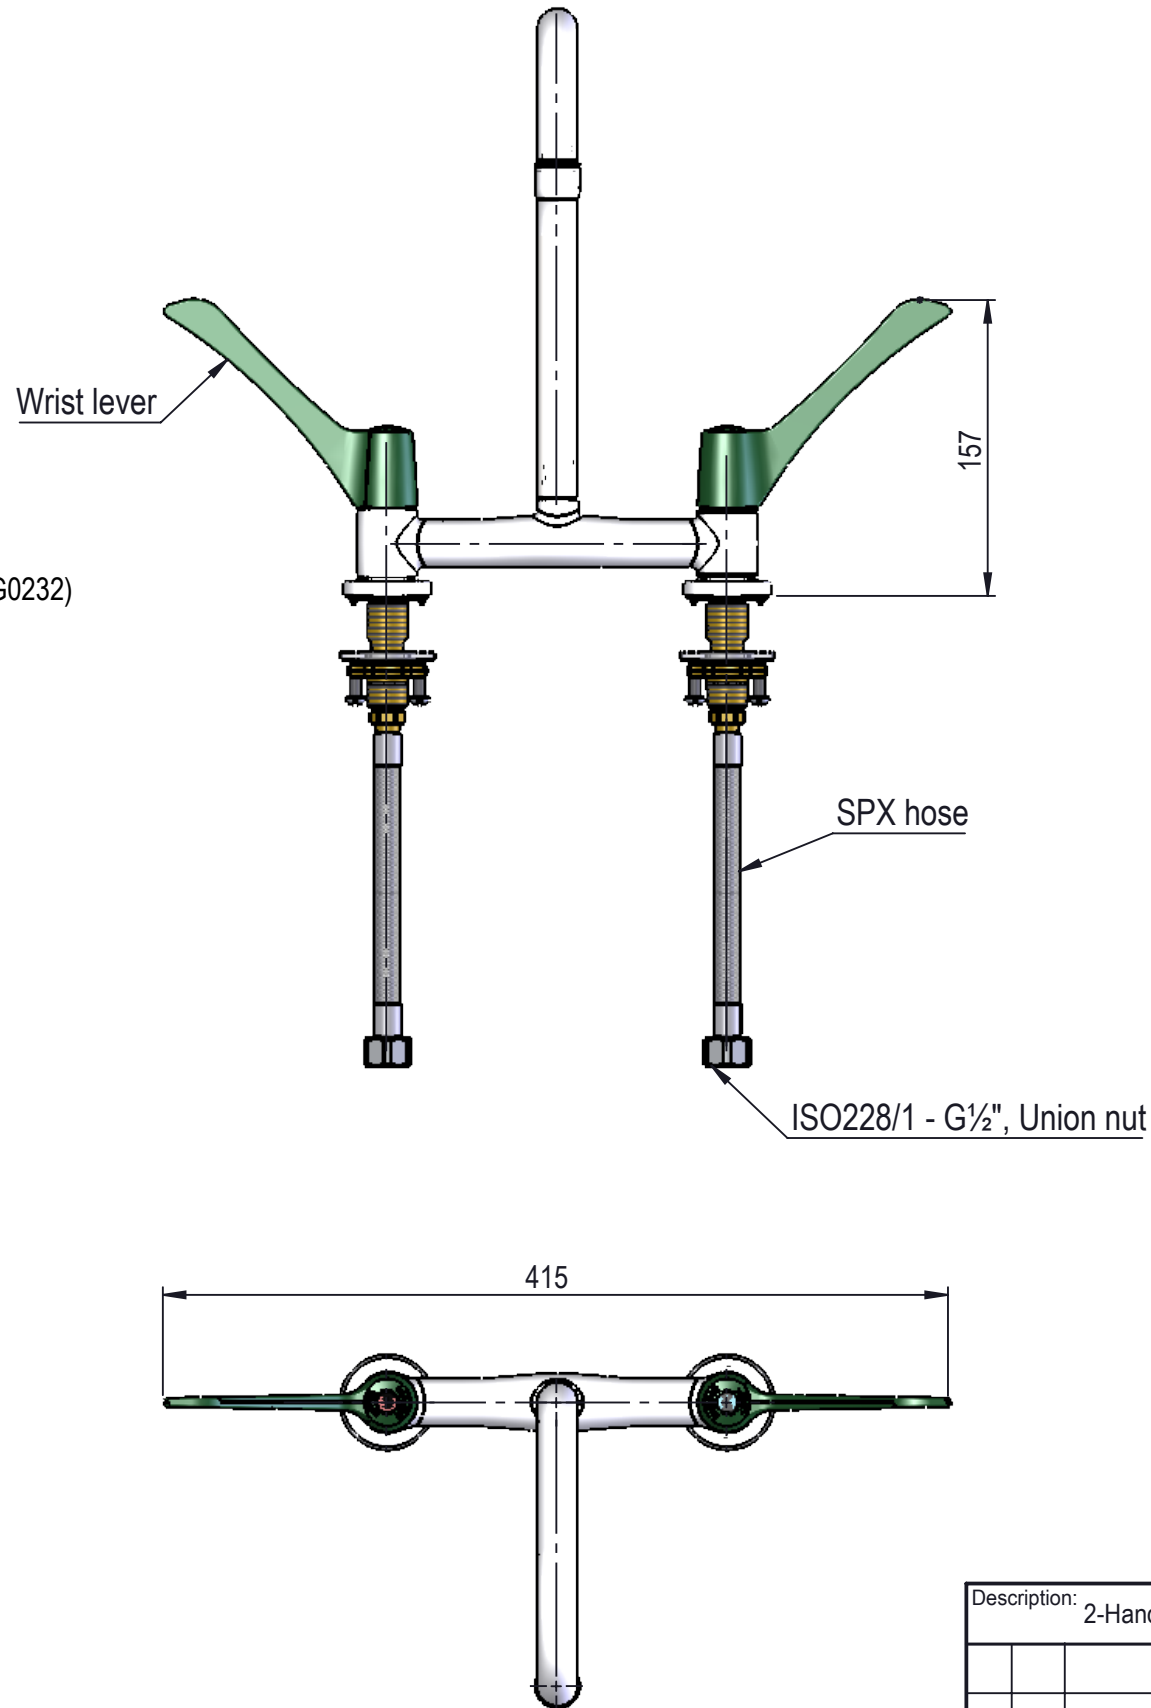

Description: 2-Hand.Mix, Bench mounted, 2-Hole, Swivel spout, Aerator

B	A2	12-03-25	7100	VEF	VEF	Fixed Drawing No.:	
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	
				brownall Labtap®		This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S. Revision 14-01-2011	

Media: Hot and cold water			
Comments:			
Drawing type: Customer drawing			Weight: 2.032 Kg
Designed by: VEF	Drawn by: VEF	Released on TM No.	Date (DD-MM-YY): 27-09-22
Format: A3	Drawing No.: XL3617182XX-14E		

MEDIA CODE XX FOR WATER
TWO HANDLE MIXER
*Model shown for WPC/WPH

Media	Media description	Media code XX
WPC WPH	Water potable cold / hot	39
WNC WCH	Water non-potable cold / hot	40