

Area of Application:
Turret
Burning gases

Max. working pressure 7 bar







Details:
"Lift/turn" safety handle, open/close 90°
3-Zone colour, acc. to EN13792:2002
BROEN-LAB Polyester powder coated colour 2700

Fixed nozzle

Materials in media contact:
Brass
Rubber, NBR
Mineral oil based lubricant
Nickel plated, Brass

Mounting:
½" nut with locking plate, O-ring and washer (See 94G0232)

Inlet / outlet connection:
UniFlex
DIN 12 898 hose nozzle

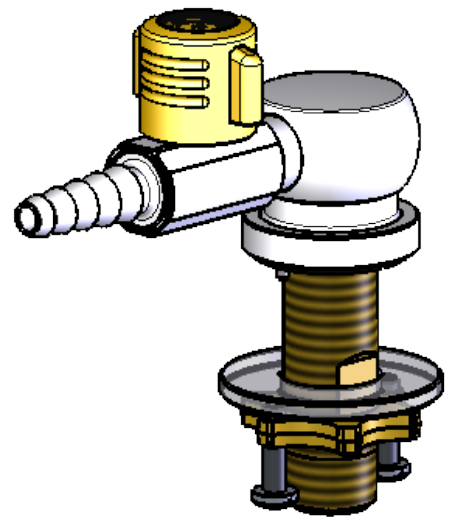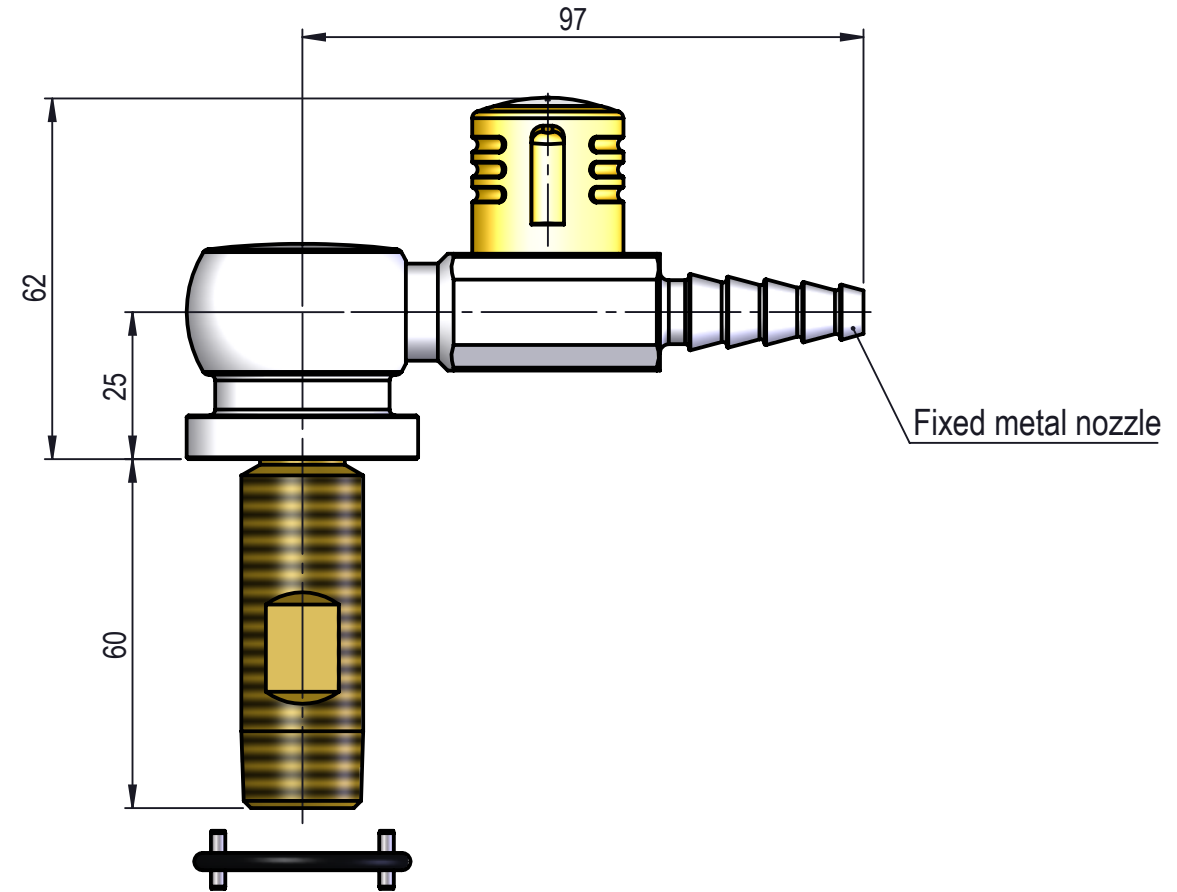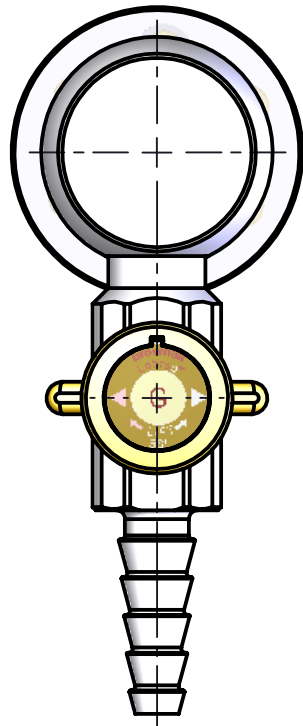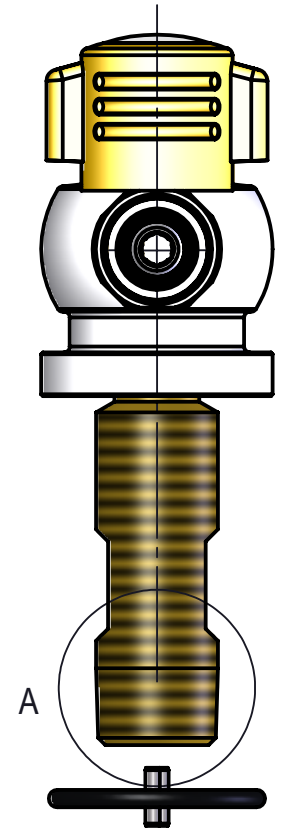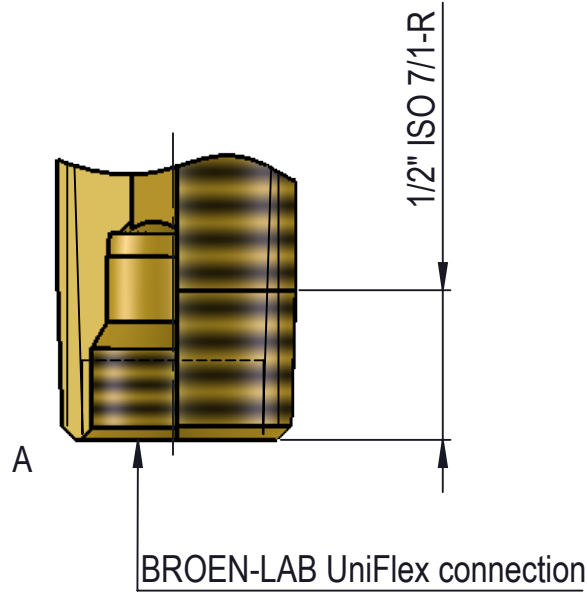

MEDIA CODE XX FOR
BURNING GAS FITTINGS FOR
LIFT / TURN HANDLE
ACCORDING TO EN 13792
*Model shown for G

Media	Media description	Media code XX
G	Natural gas	10
LPG	Propane/butane (liquefied gasses)	12

Description: 1-Valve, Turret, 1-Hole, , DIN 12 898 hose nozzle

							Media: Burning gases			
							Comments:			
B		01-06-23			PEC		Drawing type: Customer drawing			Weight: 0.622 Kg
C		31-10-23	7100	PEC	PEC	Updatet drawing				
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by: JJE	Drawn by: SJE	Released on TM No.	Date (DD-MM-YY): 06-10-20
brownall ®				This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S. Revision 14-01-2011			Format: A3		Drawing No.: XL9956182XX-14	

brownall
®

This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.
Revision 14-01-2011