

Area of Application:
Turret (90°)
Technical gases 2.0 and Burning gases

Max. working pressure 7 bar






Details:
"Lift/turn" safety handle, open/close 90°
3-Zone colour, acc. to EN13792:2002
BROEN-LAB Polyester powder coated colour 2700

Fixed nozzle

Materials in media contact:
Brass
Rubber, NBR
Mineral oil based lubricant
Nickel plated, Brass

Mounting:
½" nut with locking pins, O-ring and washer (See 94G0232)

Inlet / outlet connection:
UniFlex
DIN 12 898 hose nozzle

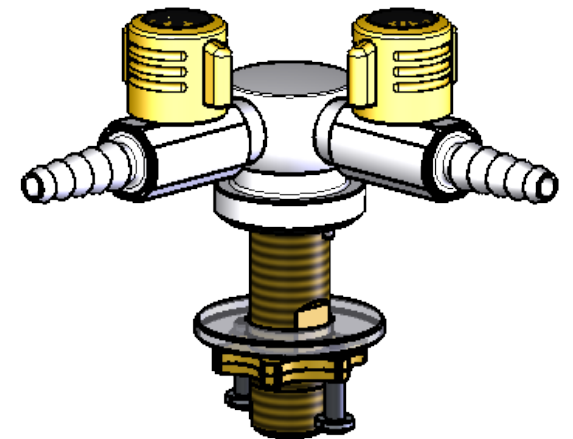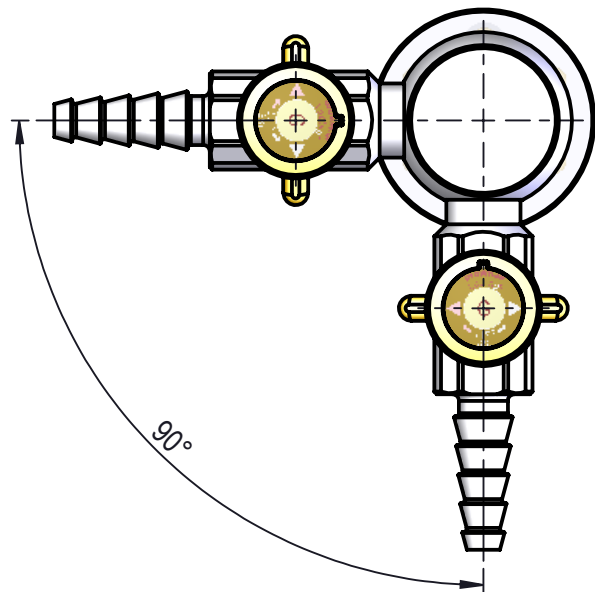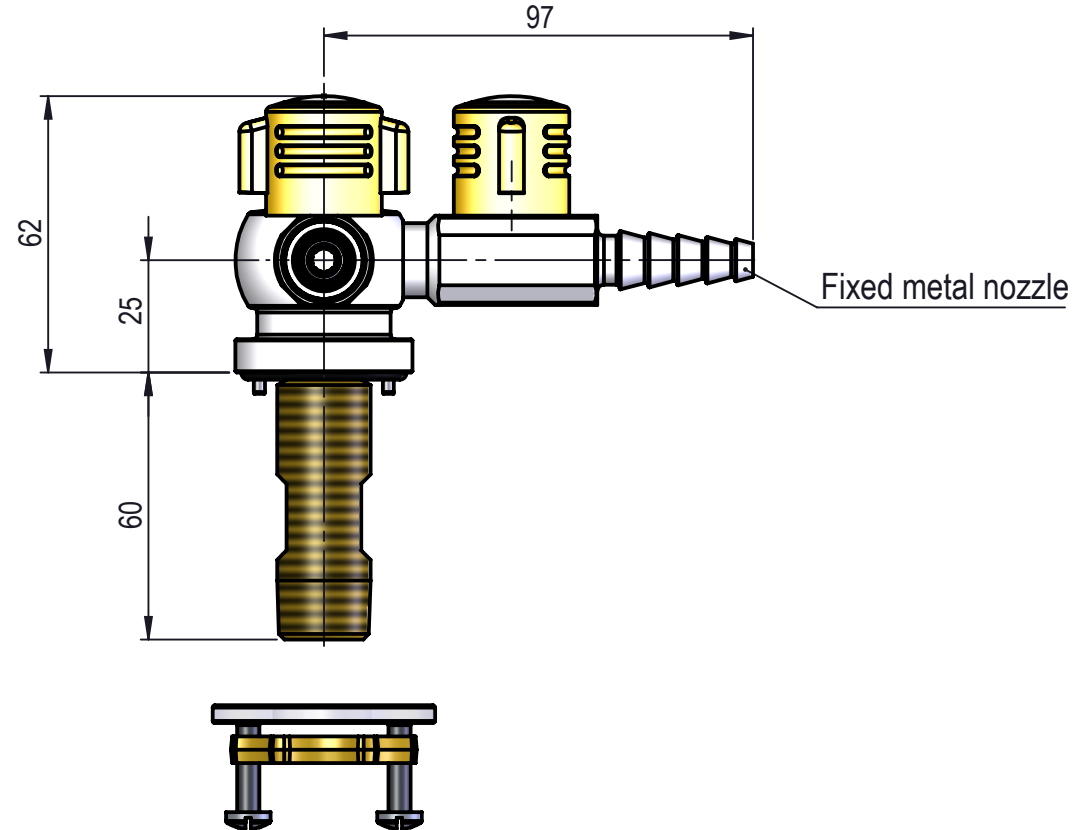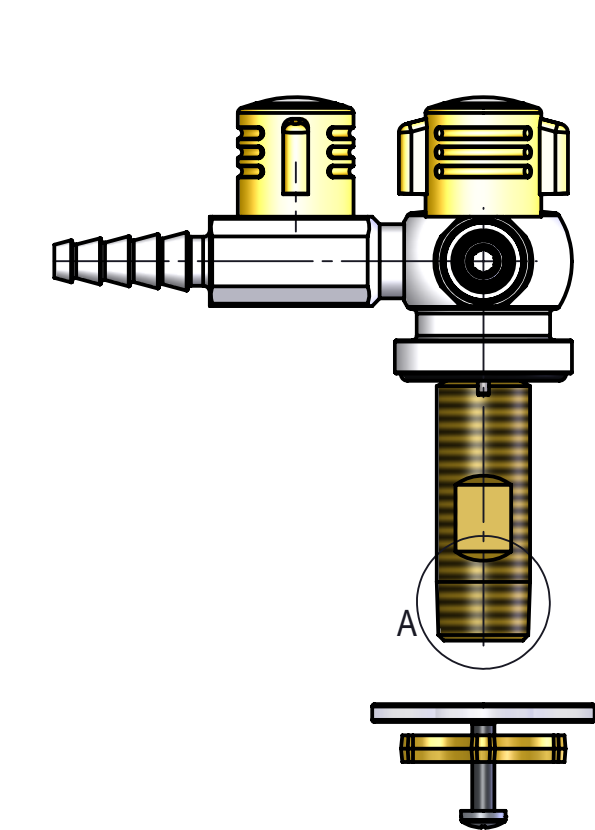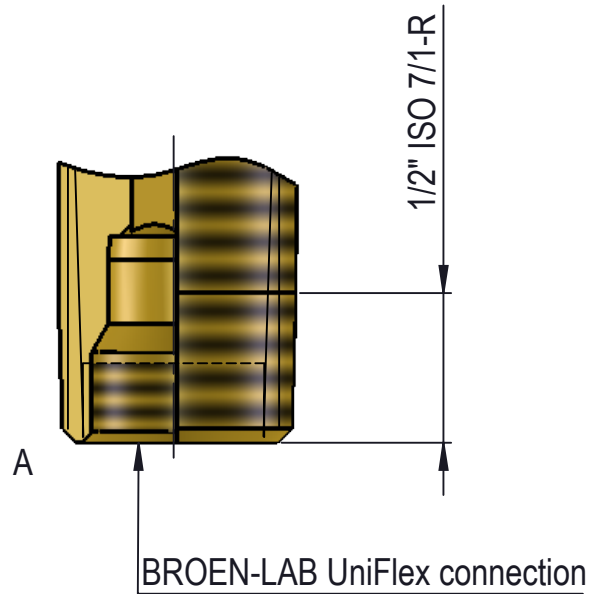

MEDIA CODE XX FOR
BURNING GAS FITTINGS FOR
LIFT / TURN HANDLE
ACCORDING TO EN 13792
*Model shown for G

Media	Media description	Media code XX
G	Natural gas	10
LPG	Propane/butane (liquefied gasses)	12

Description: 2-Valves, Turret (90°), 1-Hole, Fixed, UniFlex

							Media: Technical gases 2.0 and Burning gases			
							Comments:			
B		01-06-23			PEC		Drawing type: Customer drawing			Weight: 0.761 Kg
C		31-10-23			PEC					
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by: REK	Drawn by: REK	Released on TM No.	Date (DD-MM-YY): 23-07-20
brownall Labtap®				This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S. Revision 14-01-2011			Format: A3		Drawing No.: XL9956282XX-14	