

Area of Application:
Turret (180°)
Burning gases

Max. working pressure 7 bar






Details:
"Lift/turn" safety handle, open/close 90°
3-Zone colour, acc. to EN13792:2002

Fixed nozzle

Materials in media contact:
Brass
Rubber, NBR
Mineral oil based lubricant
Nickel plated, Brass

Mounting:
½" nut with locking plate, O-ring and washer (See 94G0232)

Inlet / outlet connection:
UniFlex
DIN 12 898 hose nozzle

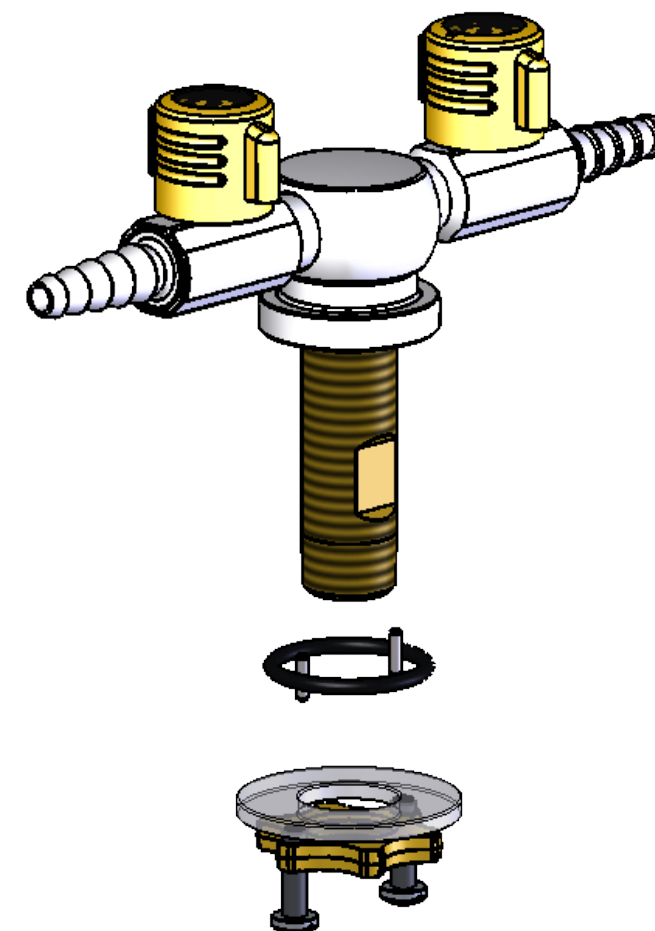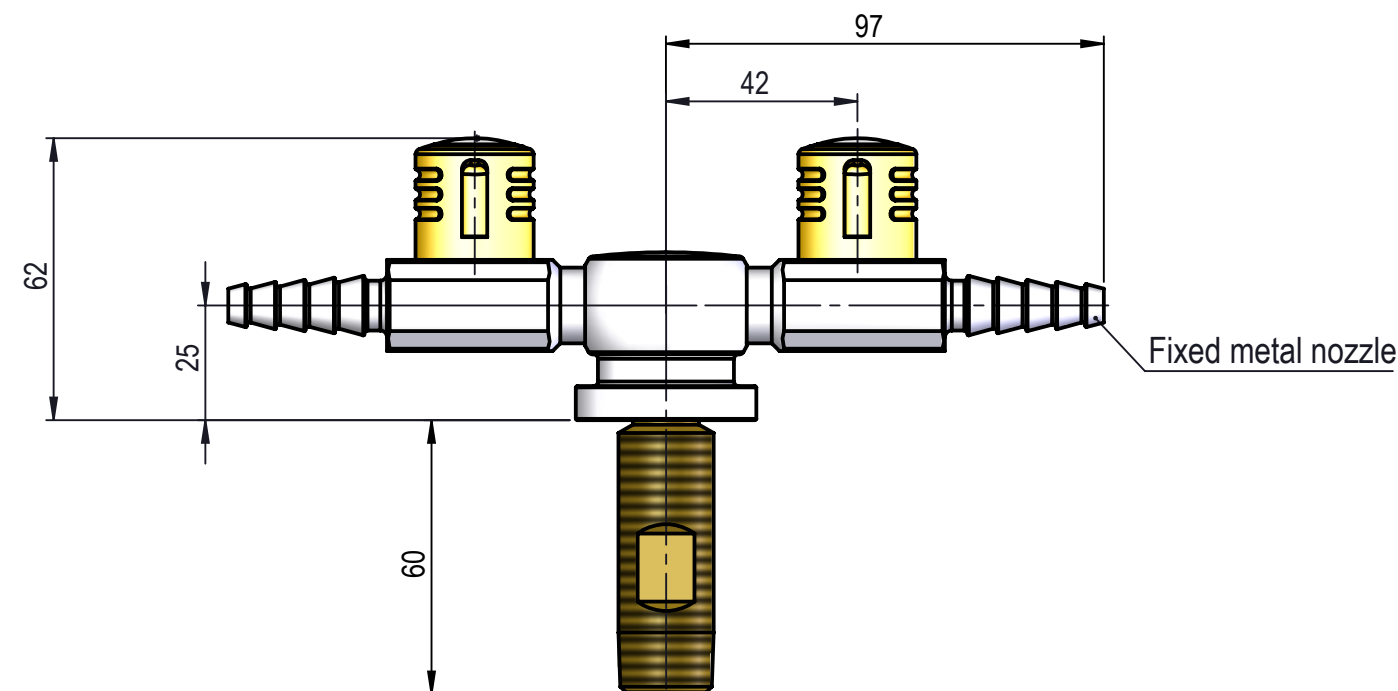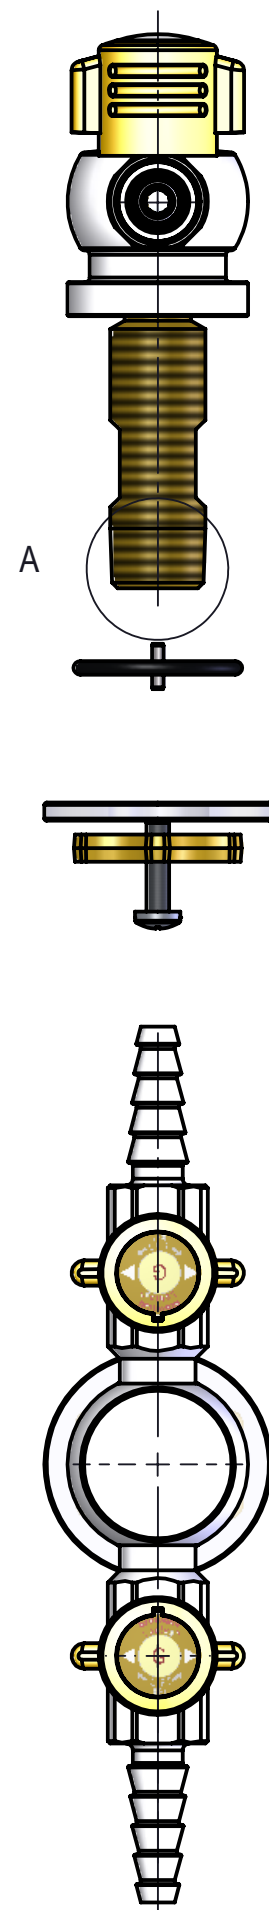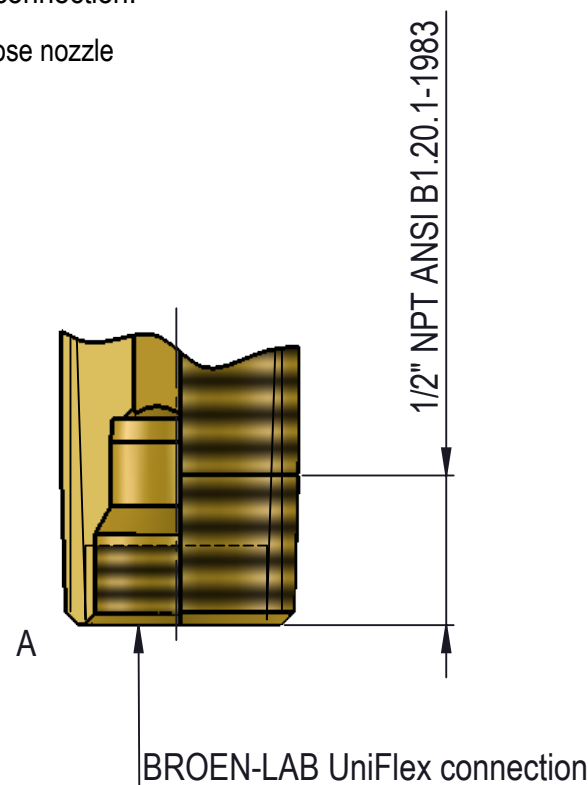

MEDIA CODE XX FOR
BURNING GAS FITTINGS FOR
LIFT / TURN HANDLE
ACCORDING TO EN 13792

Media	Media description	Media code XX
G	Natural gas	10
LPG	Propane/butane (liquefied gasses)	12

Description: 2-Valves, Turret (180°), 1-Hole , DIN 12 898 hose nozzle

							Media: Burning gases
							Comments:
							Drawing type: Customer drawing
							Weight: 0.761 Kg
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by: JJE
brownall®				This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S. Revision 14-01-2011			Drawn by: SJE
							Released on TM No.
							Date (DD-MM-YY): 06-10-20
				Format: A3		Drawing No.: XL9957782XX-14	