

Area of Application:
Turret (360°)
Burning gases

Max. working pressure 7 bar



Details:
"Lift/turn" safety handle, open/close 90°
3-Zone colour, acc. to EN13792:2002
BROEN-LAB Polyester powder coated colour 2700

Fixed nozzle

Materials in media contact:
Brass
Rubber, NBR
Mineral oil based lubricant
Nickel plated, Brass

Mounting:
½" nut with locking plate, O-ring and washer (See 94G0232)

Inlet / outlet connection:
UniFlex
DIN 12 898 hose nozzle

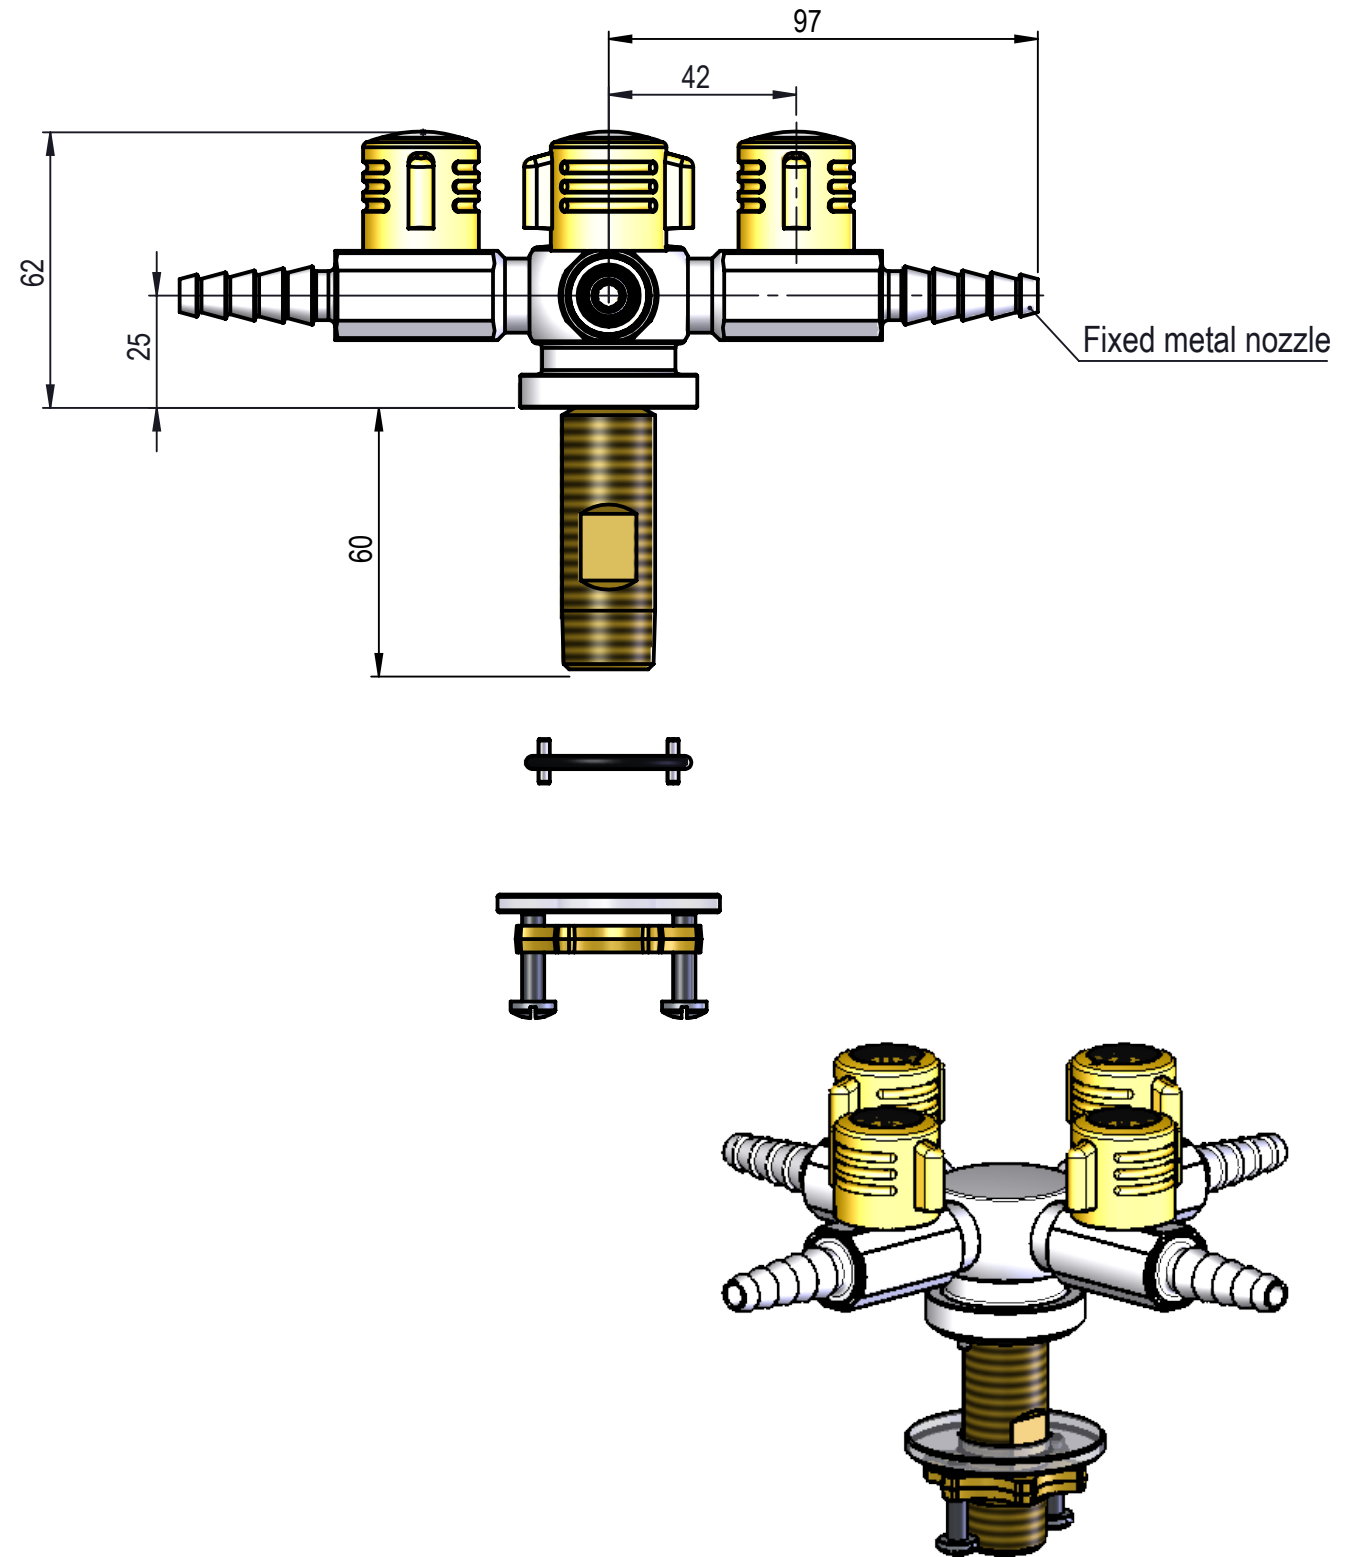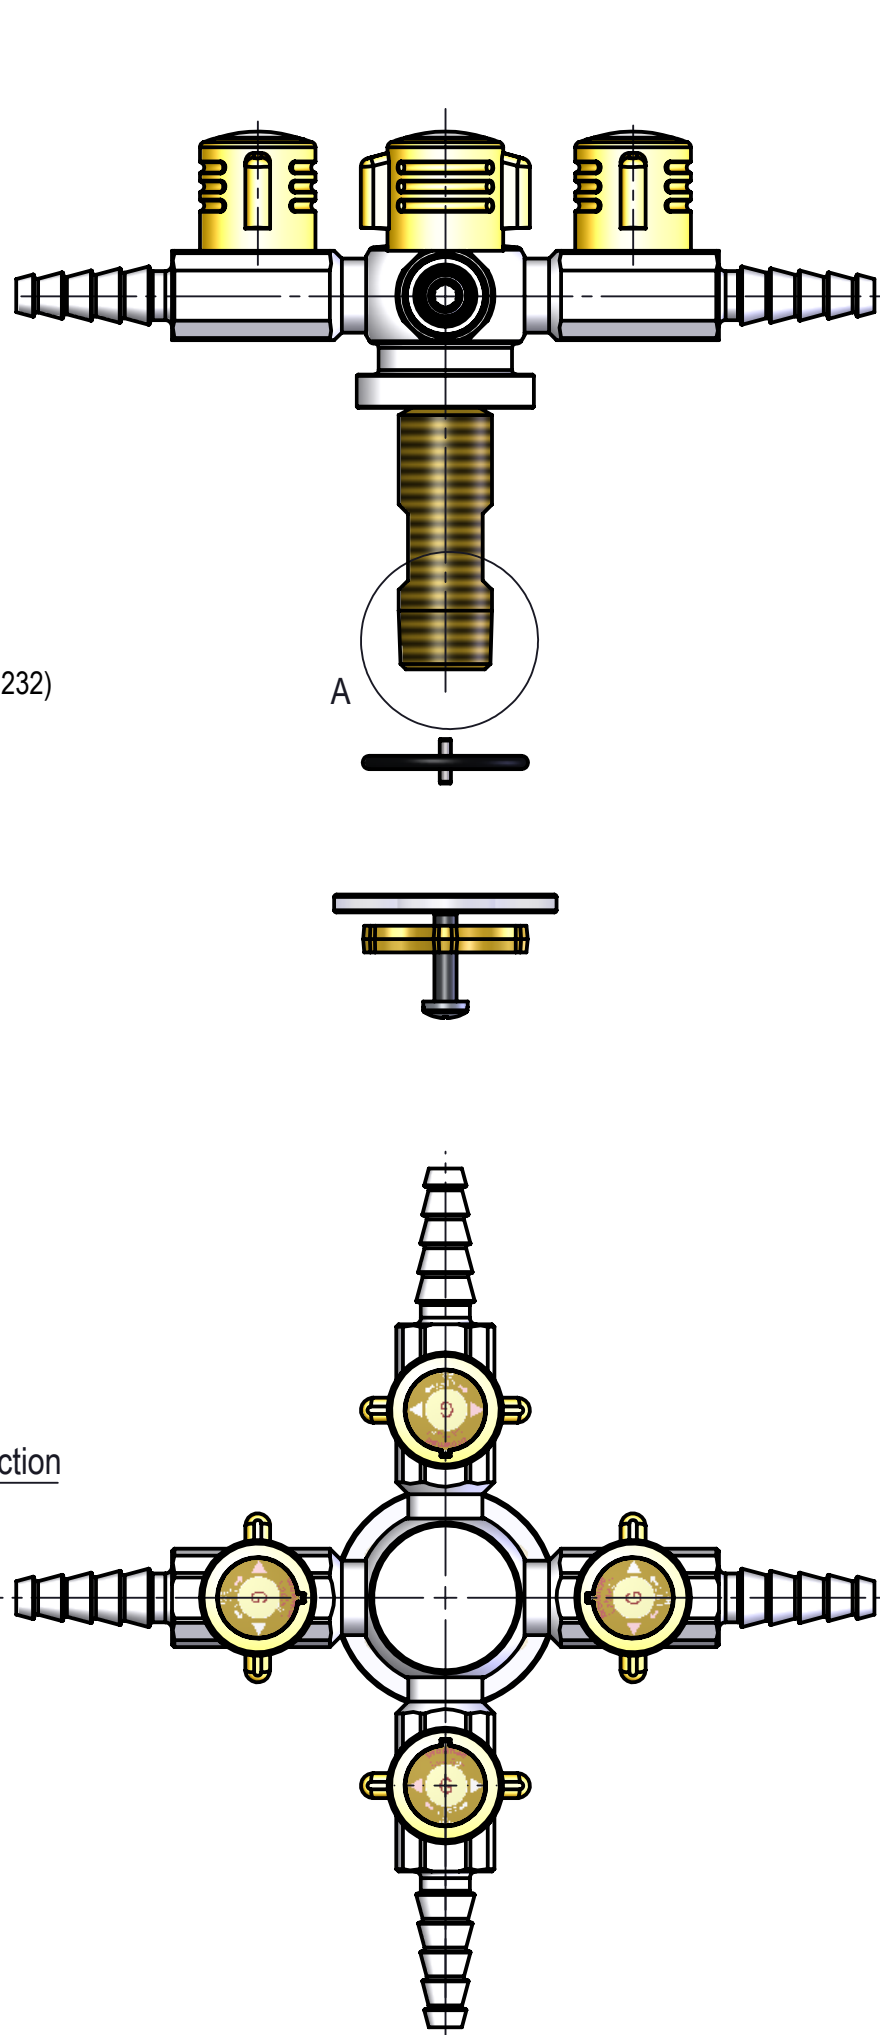

MEDIA CODE XX FOR
BURNING GAS FITTINGS FOR
LIFT / TURN HANDLE
ACCORDING TO EN 13792
*Model shown for G

Media	Media description	Media code XX
G	Natural gas	10
LPG	Propane/butane (liquefied gasses)	12

Description: 4-Valves, Turret (360°), 1-Hole, Fix. Nozzle, DIN 12 898 hose nozzle

						Media: Burning gases	
						Comments:	
B	01-06-23			PEC		Drawing type: Customer drawing	Weight: 1.039 Kg
C	31-10-23			PEC			
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by: JJE
							Drawn by: SJE
							Released on TM No.
							Date (DD-MM-YY): 06-10-20
							Format: A3
							Drawing No.: XL9957882XX-14

brownall
Labtap®

This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.
Revision 14-01-2011